

Engine Oils Cars and Vans

Wolver SuperTec

5W-30 / 5W-40

PACKAGING

200 L | 60 L | 20 L | 5 L | 4 L | 1 L

Wolver SuperTec is a HC-synthetic lightrun motor oil especially developed for heavy duty gas and diesel car engines.

Wolver SuperTec meets the manufacturers' high quality demands for cars. It is excellently applicable for long oil changing intervals and for motors with direct injection.

Ideal for hard use at motorways and over short distances.



SPECIFICATIONS:

SAE 5W-30 API SN/CF/EC ACEA A3/B4

MEETS THE REQUIREMENTS OF:

MB 229.31; VW 502.00, 505.00, 505.01;
BMW Longlife-98; Renault RN 0700, RN 0710;
GM LL-B-025

SPECIFICATIONS:


SAE 5W-40 API SN/CF/EC ACEA A3/B4

MEETS THE REQUIREMENTS OF:

MB-Approval 229.3; BMW Longlife-01;
FIAT 9.55535-MA2; OPEL GM-LL-B-025;
Porsche A40; PSA B71 2296;
Renault RN 0710/RN 0700;
VW 502.00, 505.00

PROPERTIES	UNIT	5W-30	5W-40
Density at 15°C	kg/m ³	855	856
Viscosity at -30°C	cP	5230	65410
Viscosity at 40°C	cSt	61.7	88.4
Viscosity at 100°C	cSt	10.6	14.0
Viscosity index		163	174
Flash point COC	°C	230	232
Pour point	°C	-42	-40
TBN	mg KOH/g	8.1	10.0

Extended drain intervals, depending on operating conditions.

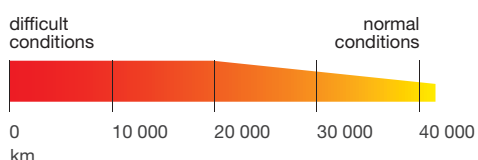

Attention: Service instructions should be observed! Wolver is a registered trademark of Wolver Lab GmbH Cologne, Germany

